



# S7 Series IP Full Body Camera



## OVERVIEW

The TruVision Series 7 IP cameras with smart event capabilities available in 4, 8 and 12MP resolution deliver high-quality images thanks to their extreme low light sensitivity and enhanced image processing. The rich set of features make these cameras the ideal choice for demanding security, surveillance and monitoring applications.

The cameras support up to 10 configurable video streams which allow users to optimize the camera's remote live view capabilities while controlling the bandwidth usage. In addition to the compatibility with other TruVision products and 3rd party VMS software, the cameras also support local MicroSD card recording to protect data in the event of network disruptions.

The enhanced embedded video intelligence capabilities go above and beyond standard event detection allowing operators to receive realtime event notifications and reduce the time needed for post-incident investigation.

The camera can be installed in the TVC-OH3-HT outdoor housing with integrated IR, controlled by the camera's RS485 connection.

## DETAILS

- Resolution options 4, 8, 12MPx
- H.265, H.264 and MJPEG compression
- 10 independent configurable video streams
- ONVIF Profiles S, G and T
- Rich video intelligence (VCA)
- Up to 140 dB Wide Dynamic Range
- Edge recording up to 256 GB with optional SD card

Technical Specifications


|                      |                                | TVC-5712  | TVC-5713  | TVC-5714  |
|----------------------|--------------------------------|---|---|---|
| General              | Technology                     | IP  |   |   |
|                      | Video standard                 | PAL   |   |   |
|                      | Image settings                 | De-Fog, Electronic Image Stabilization, Hallway View, Mirror  |   |   |
|                      | Privacy masking                | 8 zones   |   |   |
|                      | Video output                   | BNC (for installation only)   |   |   |
|                      | Software compatibility         | Milestone XProtect, OnGuard, TruVision Navigator, TVRmobile, Web Browser  |   |   |
| Camera               | Sensor size                    | 1/1.8"  |   | 1/1.7"  |
|                      | Max. resolution                | 4 MP  | 8 MP (4K)   | 12 MP   |
|                      | Sensor scan                    | Progressive   |   |   |
|                      | Sensor type                    | CMOS  |   |   |
|                      | Shutter time                   | 1 to 1/100,000 s  |   |   |
| Lighting performance | WDR type                       | True WDR  |   | Digital WDR   |
|                      | WDR                            | 140 dB  | 120 dB  | DWDR  |
|                      | Digital noise reduction        | 3D DNR  |   |   |
|                      | Day/night                      | True Day/Night  |   |   |
|                      | Motorized IR cut filter        | Yes   |   |   |
|                      | Color sensitivity              | 0.002 Lux @ (F1.2, AGC ON)<br>0.0002 Lux @ (F1.2, AGC ON), 0 lux with IR ON/  | Color: 0.007 Lux @ (F1.2, AGC ON)<br>B/W: 0.0007 Lux @ (F1.2, AGC ON) | Color: 0.008 Lux @ (F1.2, AGC ON)<br>B/W: 0.0008 Lux @ (F1.2, AGC ON) |
|                      | B/W trigger                    | Auto/Schedule/Triggered by alarm in   |   |   |
| Encoding             | Video streams                  | 10  |   |   |
|                      | Main stream compression        | H.264, H.265  |   |   |
|                      | Sub stream compression         | H.264, H.265, MJPEG   |   |   |
|                      | Third stream compression       | H.264, H.265, MJPEG   |   |   |
|                      | Video bit rate                 | 32 to 16 Mbps   |   |   |
|                      | Main stream resolutions        | 1280 x 720 (XVGA), 1600 x 1200 (UXGA), 1920 x 1080 (1080p), 2560 x 1440   |   |   |
|                      | Sub stream resolutions         | 640 x 480 (VGA), 704 x 576 (4CIF)   |   |   |
|                      | Third stream resolutions       | 1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p), 640 x 480 (VGA), 704 x 576 (4CIF)  |   |   |
|                      | Max. resolution @ fps          | 2560 x 1440 @ 25/30 fps   | 3840 x 2160 @ 25/30 fps   | 3840 x 2160 @ 25/30 fps   |
|                      | 4th to 10th stream compression | H.265, H.264, MJPEG   |   |   |
|                      | 4th stream resolutions         | 1920 x 1080 (1080p), 1280 x 720 (XVGA), 704 x 576 (4CIF), 640 x 480 (VGA)   |   |   |
|                      | 5th stream resolutions         | 704 x 576 (4CIF), 640 x 480 (VGA)   |   |   |
|                      | 6th to 10th stream resolutions | 1920 x 1080 (1080p), 1280 x 720 (XVGA), 704 x 576 (4CIF), 640 x 480 (VGA)   |   |   |
| Lens                 | Lens type                      | C/CS mount lens to be ordered separately  |   |   |
|                      | Auto-iris                      | Yes   |   |   |
| Network              | Network interface              | RJ-45 10/100 Mbps self-adaptive Ethernet interface  |   |   |
|                      | Integration                    | CGI, ISAPI, ONVIF Profile G, ONVIF Profile S, ONVIF Profile T   |   |   |
|                      | Supported network protocols    | 802.1x, Bonjour, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, PPPoE, QoS, RTCP, RTP, RTSP, SMTP, SNMP, TCP/IP, UPnP  |   |   |
|                      | Security                       | Password protection, HTTPS encryption, 802.1x authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.2 |   |   |

|                    |                            | TVC-5712  | TVC-5713 | TVC-5714 |
|--------------------|----------------------------|---|----------|----------|
| Audio              | Audio compression          | G.711alaw, G.711ulaw, G.722.1, G.726, MP2L2, MP3, PCM   |          |          |
|                    | Audio in                   | 1 line in/mic.in  |          |          |
|                    | Audio out                  | 1 line out  |          |          |
| Alarm I/O          | Alarm inputs               | 2   |          |          |
|                    | Alarm outputs              | 2 outputs (24 VAC/VDC, 1A max)  |          |          |
|                    | Alarm I/O connection       | Terminal block  |          |          |
| Storage            | Local storage support      | Yes   |          |          |
|                    | Local storage type         | Built-in Micro SD/SDHC/SDXC card slot   |          |          |
|                    | Max. storage capacity      | 256 GB  |          |          |
|                    | Additional storage options | NAS (NFS,SMB/CIFS)  |          |          |
| Video intelligence | Alarm trigger              | HDD error, HDD full, Invalid login, IP address conflict, Network disconnected   |          |          |
|                    | ROI                        | Up to 4 fixed regions for one of 5 the first streams<br>Dynamic region for face tracking  |          |          |
|                    | Video analytics            | Advanced motion detection, Audio exception detection, Defocus, Face detection, Intrusion detection, Line crossing detection, Object removal detection, Region entrance detection, Region exiting detection, Scene change detection, Unattended baggage detection                                  |          |          |
| Electrical         | Operating voltage          | 12 VDC is recommended, 10 to 48 VDC, 24 VAC is recommended, 15 to 36 VAC, two-core terminal block PoE (802.3af, class 3), reverse polarity protection   |          |          |
|                    | Power consumption          | 12 VDC, 0.65 A, max. 7.6 W; 24 VAC, 0.55 A, max. 7.6 W; PoE (802.3af, 36 V to 57 V), 0.1 A to 0.3 A, max. 7.6 W, class 3 With external load connected to camera power output: 12 VDC, 0.8 A, max. 10 W; 24 VAC, 0.7 A, max. 10 W; PoE (802.3af, 36 V to 57 V), 0.1 A to 0.3 A, max. 10 W, class 3 |          |          |
| Physical           | Physical dimensions        | 142.6 x 69.8 x 68 mm  |          |          |
|                    | Net weight                 | 730 g   |          |          |
|                    | Colour                     | Black   |          |          |
|                    | Form Factor                | Full Body   |          |          |
| Environmental      | Environment                | Indoor  |          |          |
|                    | Operating temperature      | -30 to +60°C  |          |          |
|                    | Relative humidity          | <95% (non-condensing)   |          |          |
| Regulatory         | Compliance                 | CE, FCC, REACH, RoHS, UL, WEEE, RCM   |          |          |

# S7 Series Full Body Camera

National Sales Enquiries  
10 Ferntree Place  
Notting Hill, Victoria 3168  
Phone: 1300 361 479  
Outside Australia: +61 3 9239 1200

## Dimensional Diagram

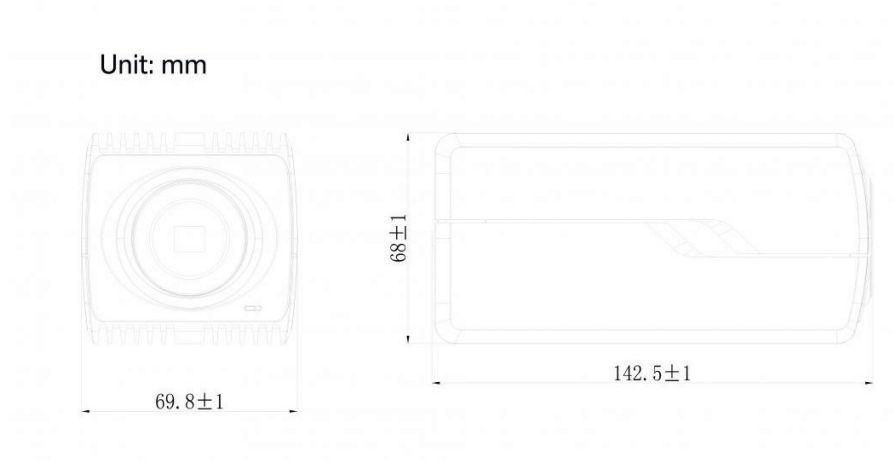

## Ordering Information

|          |   |
|----------|---|
| TVC-5712 | TruVision IP Full Body Camera, H.265, 4MP, Super Low Light, WDR, true D/N, Auto Back Focus, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, PoE (802.3-af) /12VDC/24VAC    |
| TVC-5713 | TruVision IP Full Body Camera, H.265, 8MP/4K, Super Low Light, WDR, true D/N, Auto Back Focus, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, PoE (802.3-af) /12VDC/24VAC |
| TVC-5714 | TruVision IP Full Body Camera, H.265, 12MP Super Low Light, DWDR, true D/N, Auto Back Focus, Audio, Alarm, BNC, micro SD/SHDC slot, Intelligence, PoE (802.3-af) /12VDC/24VAC   |

## Accessories

|            |  |
|------------|--|
| TVC-OH3-HT | Outdoor housing with integrated IR   |
| TVL-006    | TruVision 12MP lens, 10 to 50mm VF, F1.2, CS, IR Sensitive, for up to 12MP Full Body cameras |



Specifications subject to change without notice.  
Carrier Fire & Security Australia Pty Ltd.  
© 2021 Carrier. All rights reserved. All trademarks are the property of their respective owners.



S7\_IPFullBodyCamera-DS-210209-1